

AluLight Inspection Door

With gypsum plasterboard inlay 12.5mm, 15mm, 2x12.5mm (GKBI / H2) for installation in walls and ceilings in drywall construction



Product Advantages

- Impregnated gypsum plasterboard inlay suitable for wet rooms
- Security snap locks self-adjusting for all sizes
- Minimum gap between the door panel and mounting frame (no seal)

Product Description

The AluLight inspection door is intended for installation in walls and ceilings in drywall construction. The gypsum plasterboard inlay is impregnated and, therefore, is also suitable for wet rooms. The door cover is secured on both sides by means of self-adjusting security snap locks. The security snap locks ensure the retention of the door cover on every opening. The opening and closing takes place via each of two hidden snap locks.

Scope of Supply

- ✓ Inspection door
- ✓ Installation kit protective caps for screws
- ✓ Installation instructions

Installation and Fixing

Simple fitting of the mounting frame in the structure opening. This must be made approx. 5mm larger than the installation dimensions of the inspection door. For wall installation the locks must always be arranged at the top. The fixing takes place from the front through the panelling and the mounting frame using customer-supplied drywall screws. Fit the protective caps to the rear of the screw tips. Please always observe the installation instructions supplied!

Filling and Painting Work

Fill the joint between the mounting frame and structure opening. Separately fill and dry the door cover. Then coat and dry it again before fitting. Completely remove any filler and paint residues. All the metallic surfaces must be clean. Then carry out a functional check by repeated opening and closing.

Cleaning and Maintenance

The components of the inspection door must be cleaned using conventional, mild cleaning agents or be cleaned dry. The door must always be properly closed. From time to time check the function of the locks. The inspection door is maintenance-free.


Accessories

Article 22-212 RS Square Lock (for retrofitting)
Article 22-216 Square Key



AluLight Inspection Door

With gypsum plasterboard inlay 12.5mm, 15mm, 2x12.5mm (GKBI / H2) for installation in walls and ceilings in drywall construction

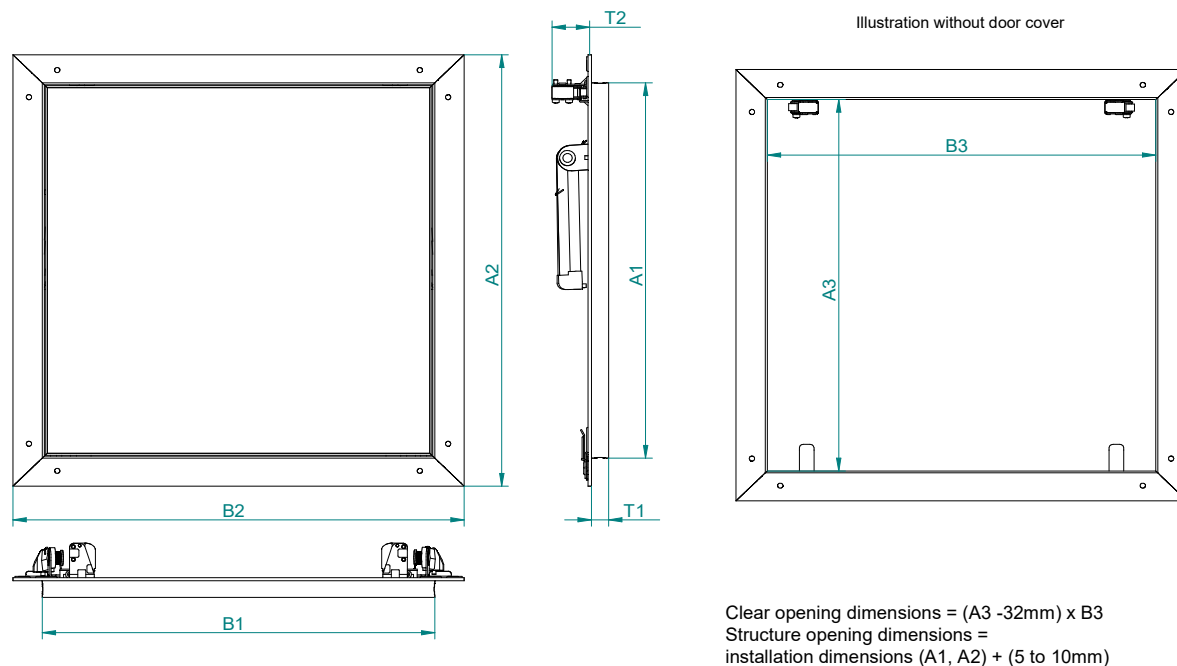

Supply Range

12.5mm gypsum plasterboard inlay CE certified according to DIN EN 520: H2

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Depth / Width		Weight kg
					T1	T2	
26-040	200 x 200	195 x 195	239 x 239	192 x 192	13	30	0.71
26-041	300 x 300	295 x 295	339 x 339	292 x 292	13	30	1.25
26-042	400 x 400	395 x 395	439 x 439	392 x 392	13	30	1.90
26-043	500 x 500	495 x 495	539 x 539	492 x 492	13	30	2.74
26-044	600 x 600	595 x 595	639 x 639	592 x 592	13	30	3.76

15mm gypsum plasterboard inlay CE certified according to DIN EN 520: DFH2

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Depth / Width		Weight kg
					T1	T2	
26-050	200 x 200	195 x 195	239 x 239	192 x 192	15.5	30	1.04
26-051	300 x 300	295 x 295	339 x 339	292 x 292	15.5	30	1.88
26-052	400 x 400	395 x 395	439 x 439	392 x 392	15.5	30	3.00
26-053	500 x 500	495 x 495	539 x 539	492 x 492	15.5	30	4.63
26-054	600 x 600	595 x 595	639 x 639	592 x 592	15.5	30	6.08

2 x 12.5mm gypsum plasterboard inlay CE certified according to DIN EN 520: H2

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Depth / Width		Weight kg
					T1	T2	
26-060	200 x 200	195 x 195	239 x 239	192 x 192	25.5	30	1.08
26-061	300 x 300	295 x 295	339 x 339	292 x 292	25.5	30	2.05
26-062	400 x 400	395 x 395	439 x 439	392 x 392	25.5	30	3.40
26-063	500 x 500	495 x 495	539 x 539	492 x 492	25.5	30	5.00
26-064	600 x 600	595 x 595	639 x 639	592 x 592	25.5	30	7.02

All dimensions in mm, (V) = locking side

Special fabrications

Minimum 200x200(V)mm to maximum 600x600(V)mm in 50mm steps