

AluNova without Insert - Inspection Door for on-site installation of 10 mm plasterboard inserts



Product Advantages

- For use of on-site inserts (10mm)
- Safety catch arms, self-adjusting
- All-round lip seal protects against dust and draughts

Product Description

The access panel AluNova (without insert) is intended for installation in walls and ceilings in dry construction. The flap lid can be fitted with an insert on site. The flap lid is secured on both sides by self-adjusting safety catch arms. The safety catch arms guarantee that the flap lid is caught every time it is opened. Opening and closing is done by pressing on the flap lid and two concealed snap locks.

Scope of Supply

- ✓ Inspection door without insert
- ✓ Installation kit protective caps for screws
- ✓ Installation instructions

Installation and Fixing

Simple fitting of the mounting frame in the structure opening. This must be made approx. 5 - 10mm larger than the installation dimensions of the inspection door. For wall mounting, the locks must be arranged at the top. The fixing takes place from the front through the panelling and the mounting frame using customer-supplied drywall screws. Fit the protective caps to the rear of the screw tips. Fill the joints and fit and close the door cover. Please always observe the installation instructions supplied!

Filling and Painting Work


Fill the joint between the mounting frame and structure opening. Separately fill and dry the door cover. Then separately coat and dry it again before fitting. Completely remove any filler and paint residues. All the metallic surfaces and seals must be clean. Then carry out a functional check by opening and closing several times.

Cleaning and Maintenance

The components of the inspection door must be cleaned using conventional, mild cleaning agents or be cleaned dry. The door must always be properly closed. Check the function of the locks from time to time. The inspection door is maintenance-free.

AluNova without Insert - Inspection Door

for on-site installation of 10 mm plasterboard inserts

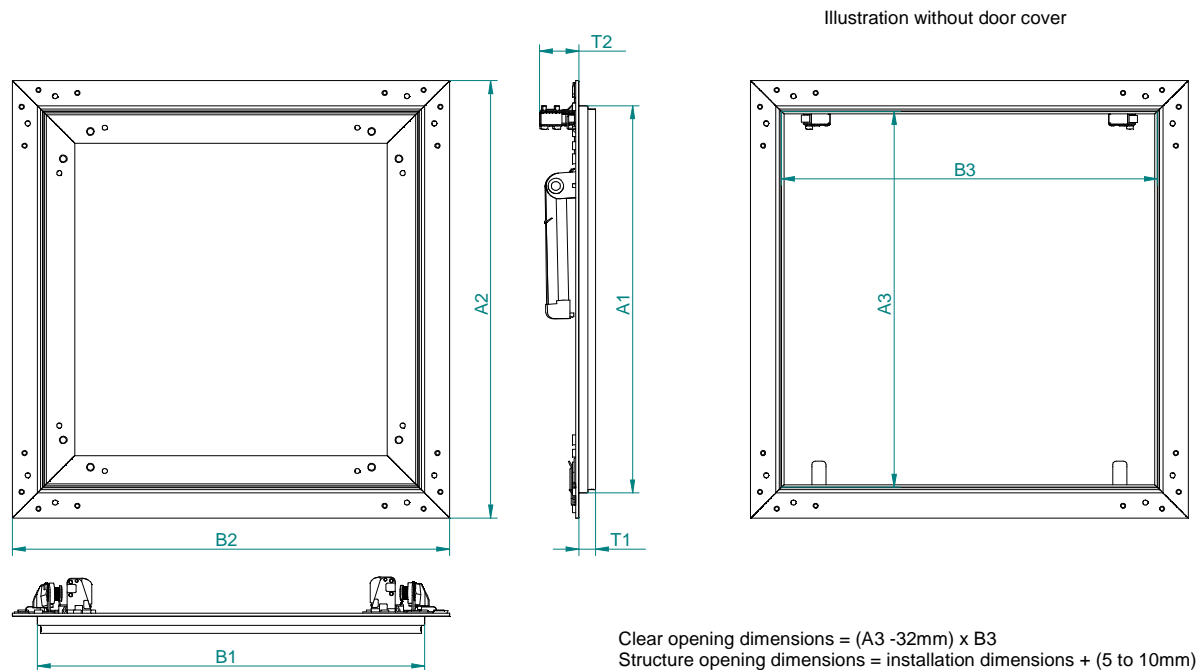

Supply Range

AluNova without insert, with rubber lip seal - for on-site installation of 10 mm plasterboard inserts

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2		Clearance Width A3 x B3		Depth / Width		Weight kg
							T1	T2	
22-140	200 x 200	200 x 200	239	x 239	191	x 191	10,5	31	0,40
22-141	300 x 300	300 x 300	339	x 339	291	x 291	10,5	31	0,50
22-142	400 x 400	400 x 400	439	x 439	391	x 391	10,5	31	0,60
22-143	500 x 500	500 x 500	539	x 539	491	x 491	10,5	31	0,80
22-144	600 x 600	600 x 600	639	x 639	591	x 591	10,5	31	0,90

All dimensions in mm, (V) = locking side