Softline Iso Inspection Door

White-coated (RAL9016), zinc-plated steel, airtight and soundproofed, for ceiling and wall installation

Tested Product:

- ✓ **Air-tight classification: Classification Class 4 in accordance with EN 12207 Windows and Doors**
- ✓ **Sound insulation value: Rw=31.8dB (with size 600x600)**

Product Advantages

- Versatilely useable in drywall and solid constructions
- Soundproofed and air-tight thanks to insulating material inserts in the door panel
- Lockable with a square lock
- Quick and simple installation by means of wall anchors

Product Description

The Softline Iso inspection door from RUG SEMIN is fitted with a special insulating material insert in the door panel. After locking the square lock, this seals the inspection door air-tight to the installation room. In addition, the insulating insert contributes to improved soundproofing. The steel components of the inspection door are zinc-plated and then powder coated in RAL9016 (traffic white) in the factory. Thereby the inspection door has a double and very good corrosion protection

Scope of Supply

- Inspection door
- Installation Instructions

Installation and Fixing

Simple fitting of the mounting frame in the structure opening (approx. 5-10mm greater than the installation dimensions of the inspection door) in walls or ceilings. Fit the inspection door from the front. Fixing from the side or the front (drywall construction) by means of fitted, rotatable and bendable wall anchors. Please always observe the installation instructions supplied!

Filling, Spatula and Painting Work

After installation, completely remove any building material or paint residues from the inspection door. Metallic surfaces and seals must be clean. Then carry out a functional check by opening and closing the door several times.

Cleaning and Maintenance

The components of the inspection door must be cleaned using conventional, mild cleaning agents or be cleaned dry. The door must always be properly closed. From time to time, check the function of the locks. Where necessary, keep the seal supple using appropriate means. Otherwise the inspection door is maintenance-free.

Special Designs

- ✓ Other RAL colours available on request
- ✓ Other sizes possible on request

Manufacturer: RUG SEMIN GmbH · Pittlerstraße 21 · 63225 Langen (D) · Tel.: +49 6103/3001-0 · service@rug-semin.de · **revisionsklappen.com**

Softline Iso Inspection Door

White-coated (RAL9016), zinc-plated steel, airtight and soundproofed, for ceiling and wall installation

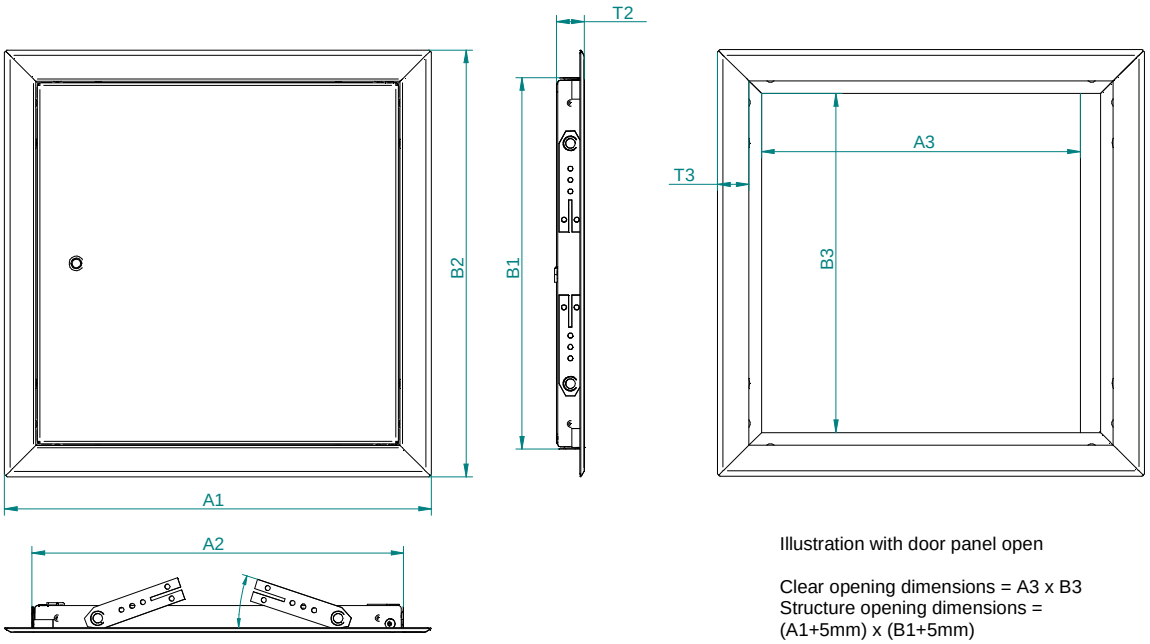

Illustration with door panel open

Clear opening dimensions = A3 x B3
Structure opening dimensions =
(A1+5mm) x (B1+5mm)

Supply Range

Softline ISO - Inspection Door

Order No.	Size A	x	B (V)	Installation Dim. A1	x	B1	Outside Dim. A2	x	B2	Clearance Width A3	x	B3	Depth / Width T2	T3	Weight kg
22-830	200	x	200	194	x	194	238	x	238	152	x	168	22	25	0.81
22-831	300	x	300	294	x	294	338	x	338	252	x	268	22	25	1.45
22-832	400	x	400	394	x	394	438	x	438	352	x	368	22	25	2.28
22-833	400	x	600	394	x	594	438	x	638	352	x	568	22	25	3.20
22-834	500	x	500	494	x	494	538	x	538	452	x	468	22	25	3.29
22-835	600	x	600	594	x	594	638	x	638	552	x	568	22	25	4.67

All dimensions in mm, (V) = locking side

Manufacturer: RUG SEMIN GmbH · Pittlerstraße 21 · 63225 Langen (D) · Tel.: +49 6103/3001-0 · service@rug-semin.de · **revisionsklappen.com**