


## Softline with cylinder lock - Inspection Door

Steel, white-coated (RAL9016) for ceiling and wall installation in drywall and solid construction

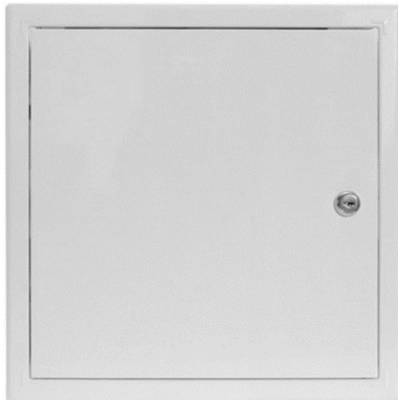

### Product Advantages

- Economic and versatile solutions in drywall and solid construction
- Numerous sizes available direct from stock
- Quick and simple installation by means of wall anchors, with removeable door panel
- Lockable with a cylinder lock and special key

### Product Description

The Softline inspection door from RUG SEMIN is a very versatilely useable solution in drywall and solid construction. The metal door is equipped with a removeable and rotatable door panel. The door is lockable with a cylinder lock. In the scope of supply there are two keys. The steel components of the inspection door are zinc-plated and then powder coated in RAL9016, traffic white, in the factory. The mounting frames for smaller sizes are manufactured in one piece, while larger sizes and special designs are produced in four parts and are spot-welded.

### Scope of Supply

- Inspection door with cylinder lock
- 2 special keys
- Installation Instructions

### Installation and Fixing

Simple fitting of the mounting frame in the structure opening (approx. 10mm greater than the installation dimensions of the inspection door) in walls or ceilings. Fit the inspection door from the front. Fixing from the side or the front (drywall construction) by means of fitted, rotatable and bendable wall anchors. Please always observe the installation instructions supplied!

### Filling, Spatula and Painting Work

Fill the joints between the door frame and the structure opening. After installation, completely remove any building material or paint residues from the inspection door. Metallic surfaces and seals must be clean. Then carry out a functional check by opening and closing the door several times.

### Cleaning and Maintenance


The components of the inspection door must be cleaned using conventional, mild cleaning agents or be cleaned dry. The door must always be properly closed. From time to time, check the function of the locks. Where necessary, keep the seal supple using appropriate means. The inspection door is maintenance-free.

### Special Designs

- Special dimensions upon request
- other RAL colours available on request

## Softline with cylinder lock - Inspection Door

Steel, white-coated (RAL9016) for ceiling and wall installation in drywall and solid construction

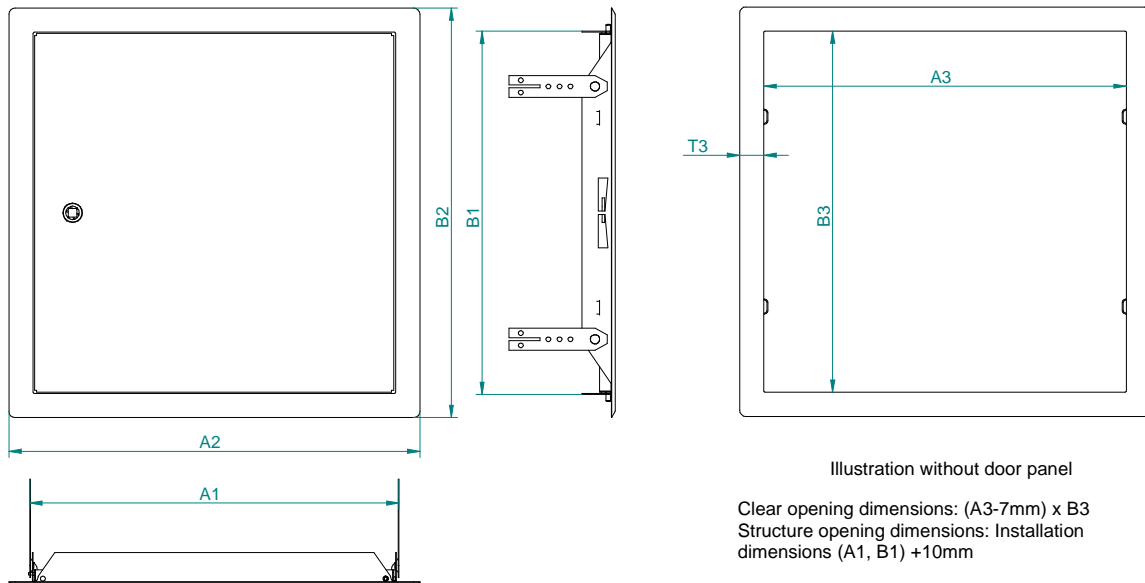

### Supply Range

#### Softline with cylinder lock - Inspection Door

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Depth / Width		Weight kg
					T2	T3	
22-701	150 x 150	150 x 150	185 x 185	145 x 145	27	20	0,40
22-702	200 x 200	200 x 200	235 x 235	195 x 195	27	20	0,50
22-703	250 x 250	250 x 250	285 x 285	245 x 245	27	20	0,80
22-704	300 x 300	300 x 300	335 x 335	295 x 295	27	20	0,90
22-705	400 x 400	400 x 400	435 x 435	395 x 395	22	20	1,40
22-706	400 x 600	394 x 594	438 x 638	368 x 568	22	25	2,40
22-712	500 x 500	494 x 494	538 x 538	468 x 468	21	25	2,50
22-713	600 x 600	594 x 594	638 x 638	568 x 568	21	25	3,40

All dimensions in mm, (V) = locking side