

AluLight Deco Inspection Door

with special gypsum board insert (12.5 mm, 25mm) for production with increased surface quality requirements, for installation in walls and ceilings in drywall construction



Product Advantages

- Production of high-quality surfaces with minimal effort and expense
- Insert in flap cover can be wiped clean with a damp cloth
- High surface resistance against mould formation and yellowing

Product Description

The AluLight Deco inspection door is intended for installation in walls and ceilings for the production of high-quality surfaces in drywall constructions. The surface of the special gypsum plasterboard inlay is finished smooth, white and pore-free and fixed without screw heads. Thanks to the minimal effort required for filling work, high-quality surfaces, for example, in quality level Q3, can be produced. The door cover is secured on both sides by means of self-adjusting security snap locks. The security snap locks ensure the retention of the door cover on every opening.

Scope of Supply

- ✓ Inspection door
- ✓ Installation kit protective caps for screws
- ✓ Installation instructions

Installation and Fixing

Simple fitting of the mounting frame in the structure opening. This must be made approx. 5-10mm larger than the installation dimensions of the inspection door. For wall mounting, the locks must always be arranged at the top. The screw fixings take place from the front through the panelling in the installation frame using customer-supplied drywall screws. The supplied protective caps are fitted to the rear of the screw tips. Fill the joints and, after separate coating, rehang the door cover. Then carry out a functional check by opening and closing the door several times. Please always observe the installation instructions supplied!

Filling and Painting Work


Fill the joint between the installation frame and the structure opening. Completely remove any filler and paint residues. Metallic surfaces must be clean!

Cleaning and Maintenance

The components of the inspection door must be cleaned using conventional, mild cleaning agents or be cleaned dry. The door must always be properly closed. From time to time, check the function of the locks. Otherwise the inspection door is maintenance-free.

AluLight Deco Inspection Door

with special gypsum board insert (12.5 mm, 25mm) for production with increased surface quality requirements, for installation in walls and ceilings in drywall construction

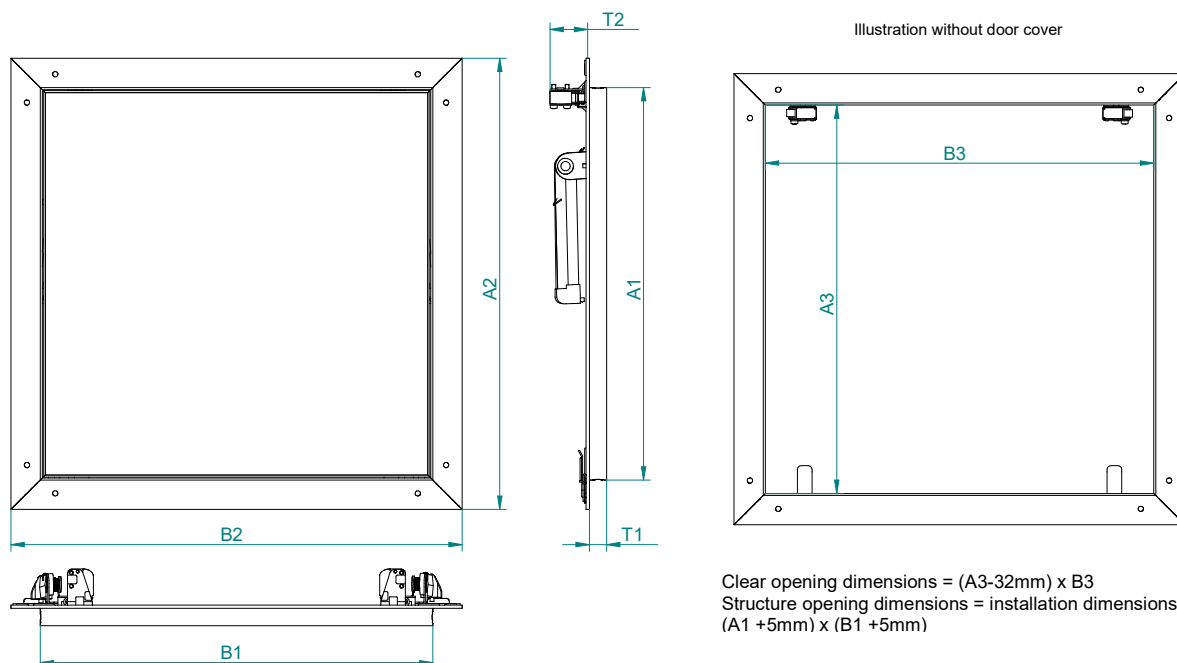

Supply Range

12.5mm gypsum plasterboard inlay CE certified according to DIN EN 520: Type A

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Depth / Width		Weight kg
					T1	T2	
22-005	200 x 200	194,5 x 194,5	238,5 x 238,5	191,5 x 191,5	13	30	0.8
22-006	300 x 300	294,5 x 294,5	338,5 x 338,5	291,5 x 291,5	13	30	1.3
22-007	400 x 400	394,5 x 394,5	438,5 x 438,5	391,5 x 391,5	13	30	2.3
22-008	500 x 500	494,5 x 494,5	538,5 x 538,5	491,5 x 491,5	13	30	2.9
22-009	600 x 600	594,5 x 594,5	638,5 x 638,5	591,5 x 591,5	13	30	4.7

2 x 12.5mm gypsum plasterboard inlay CE certified according to DIN EN 520: Type A

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Depth / Width		Weight kg
					T1	T2	
22-015	200 x 200	195 x 195	239 x 239	192 x 192	25,5	30	1.3
22-016	300 x 300	295 x 295	339 x 339	292 x 292	25,5	30	2.3
22-017	400 x 400	395 x 395	439 x 439	392 x 392	25,5	30	4.3
22-018	500 x 500	495 x 495	539 x 539	492 x 492	25,5	30	5.6
22-019	600 x 600	595 x 595	639 x 639	592 x 592	25,5	30	7.8

All dimensions in mm, (V) = locking side