

CeraMatic Tile Panels - Inspection Door

especially suitable for tiles, wet rooms, for wall mounting (12,5mm and 2x12,5mm GKBI)



Product Advantages

- Can be tiled with all common tiles (optimally thickness up to 10mm)
- Safe and simple handling thanks to sturdy components and securing elements
- Maintenance of the same joint spacing by means of a bottom spacing profile as a support
- Standard dimensions direct from stock

Product Description

The CeraMatic access panels are produced especially for use in tiled areas, for example, bathrooms, toilets, and kitchens. Impregnated gypsum plasterboard inlays in H2 quality in accordance with DIN EN 520 (GKBI) are used. The panel cover surface can be tiled with various standard tiles. In the process, an outward-facing visual joint spacing of 3-4mm is maintained. At the bottom in the mounting frame there is a silicon spacing profile used as a support and seal for the panel cover that prevents the sinking of the panel cover. A safety steel rope guarantees the catching of the flap cover with every opening. After unlocking the carabiner, the flap lid is completely removable. For flaps with a height greater than 650mm and large weight two additional safety arms are available as a catch between flap lid and mounting frame.

Scope of Supply

- ✓ Access panel packed in a cardboard box
- ✓ Installation kit protective caps for screws
- ✓ Installation instructions

Installation and Fixing

Simple installation of the aluminium frame in the opening (approx. 5mm larger than the installation dimensions) in the wall. When installing, the fasteners must be aligned towards the top. Screwing together takes place from the front right through the plasterboard and the installation frame.

Cleaning / Maintenance


Clean all components with a mild cleaning agent. The access panel is maintenance-free.

Custom-made Products

- ✓ Special dimensions in steps of millimetres on request (from approx. 200x200 up to approx. 800x800(V))
- ✓ Also available with panelling 15 mm, 18mm
- ✓ Special board inlays available
- ✓ available with RS-Square lock

CeraMatic Tile Panels - Inspection Door

especially suitable for tiles, wet rooms, for wall mounting (12,5mm and 2x12,5mm GKBI)

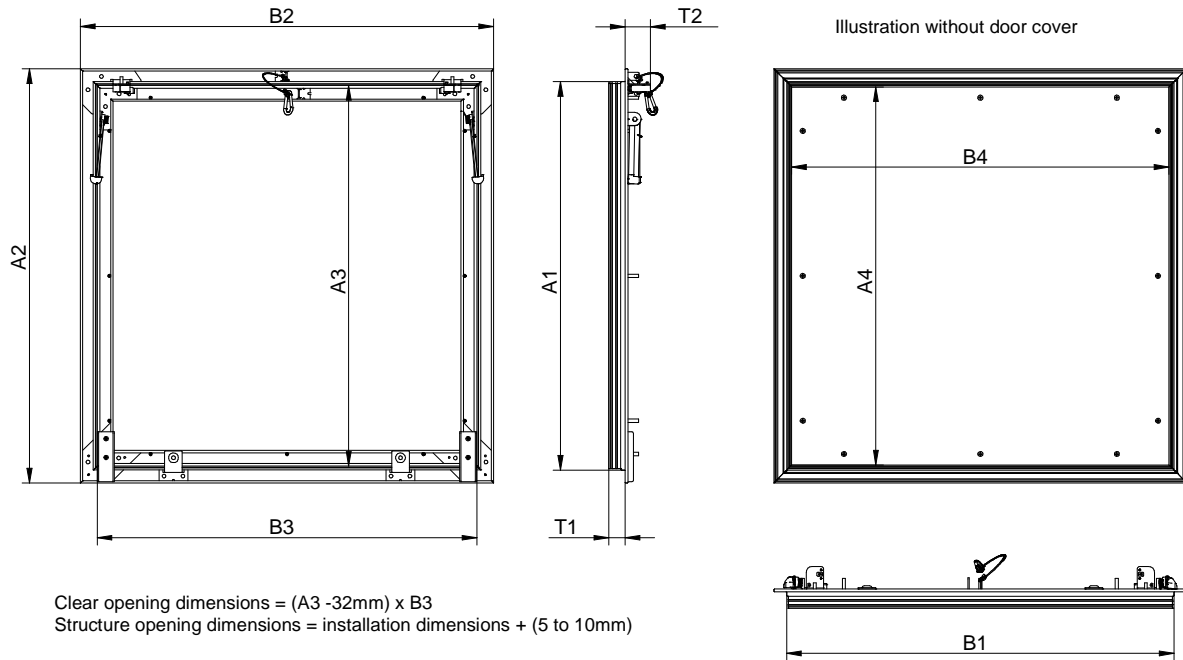


Supply Range

12,5 mm gypsum plasterboard inlay CE certified according to DIN EN 520: H2

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Tile Surface A4 x B4	Depth / Width		Weight kg
						T1	T2	
22-235	300 x 300	299 x 299	339 x 339	288 x 288	281 x 281	13	41	1,8
22-236	400 x 400	399 x 399	439 x 439	388 x 388	381 x 381	13	41	2,6
22-237	500 x 500	499 x 499	539 x 539	488 x 488	481 x 481	13	41	3,6
22-238	600 x 600	599 x 599	639 x 639	588 x 588	581 x 581	13	41	4,8

2x12,5 mm gypsum plasterboard inlay CE certified according to DIN EN 520: H2

Order No.	Size A x B (V)	Installation Dim. A1 x B1	Outside Dim. A2 x B2	Clearance Width A3 x B3	Tile Surface A4 x B4	Depth / Width		Weight kg
						T1	T2	
22-295	300 x 300	299 x 299	339 x 339	288 x 288	281 x 281	26	41	2,6
22-296	400 x 400	399 x 399	439 x 439	388 x 388	381 x 381	26	41	4,6
22-297	500 x 500	499 x 499	539 x 539	488 x 488	481 x 481	26	41	5,5
22-298	600 x 600	599 x 599	639 x 639	588 x 588	581 x 581	26	41	9,0

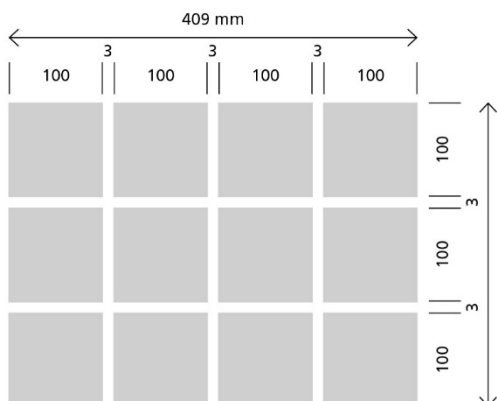

All dimensions in mm, (V) = locking side Order details:
 For dimensionally accurate customised production, please state the exact tile and joint dimensions when placing your order.

Example: Tile size 100x100mm, flap cover 4 tiles wide, 3 tiles high, joint width 3mm

4x100mm tile width = 400mm
 + 3* x 3mm joint width = 9mm
 Flap cover width B4 = 409mm

3x100mm tile height = 300mm
 + 2* x 3mm joint width = 6mm
 Flap cover height A4 = 306mm

*Number of joints = number of tiles - 1